

### WARNING

Although this hitch is designed to safely tow its rated load, we recommend that you consult your vehicle owner's manual for possible manufacturer's recommendations or limitations. Always follow the manufacturer's installation instructions and always install on the specified vehicle. Before installing hitch, check that the attachment points are in good condition.

Failure to follow these guidelines will void warranty. Any modifications to this hitch will void warranty.

### WEIGHT CARRYING HITCH CAPACITY

**6,000 LBS. MAXIMUM TRAILER WEIGHT**  
**600 LBS. MAXIMUM TONGUE WEIGHT**

### WEIGHT DISTRIBUTING HITCH CAPACITY

**10,000 LBS. MAXIMUM TRAILER WEIGHT**  
**1,000 LBS. MAXIMUM TONGUE WEIGHT**

Trailer brakes are recommended for towing loads in excess of 1500 lbs.

### ANBAUANLEITUNG

-ANHANGELAST: max 3000 kg

-STÜTZLAST : max 100 kg

-D:WERT : 17 kn


**COMI**

Part	Description	Quantity
1.	Receiver Assembly	(1)
2.	3730-05 1/2 Conical Washer	(6)
3.	3732-02 12mm x 1.25 x 40mm Hex Bolts	(6)

Anzugsdrehmomente:

M 10x30	→	40 Nm	(Festigkeitsklasse 8.8)
M 10x35	→	55 Nm	(Festigkeitsklasse 10.9)
M 10x50	→	55 Nm	(Festigkeitsklasse 10.9)
M 10x65	→	55 Nm	(Festigkeitsklasse 10.9)
M 16x50	→	170 Nm	(Festigkeitsklasse 8.8)
M 16x55	→	170 Nm	(Festigkeitsklasse 8.8)

M 10	=	46 Nm	8.8
M 12	=	80 Nm	8.8
M 12	=	115 Nm	10.9

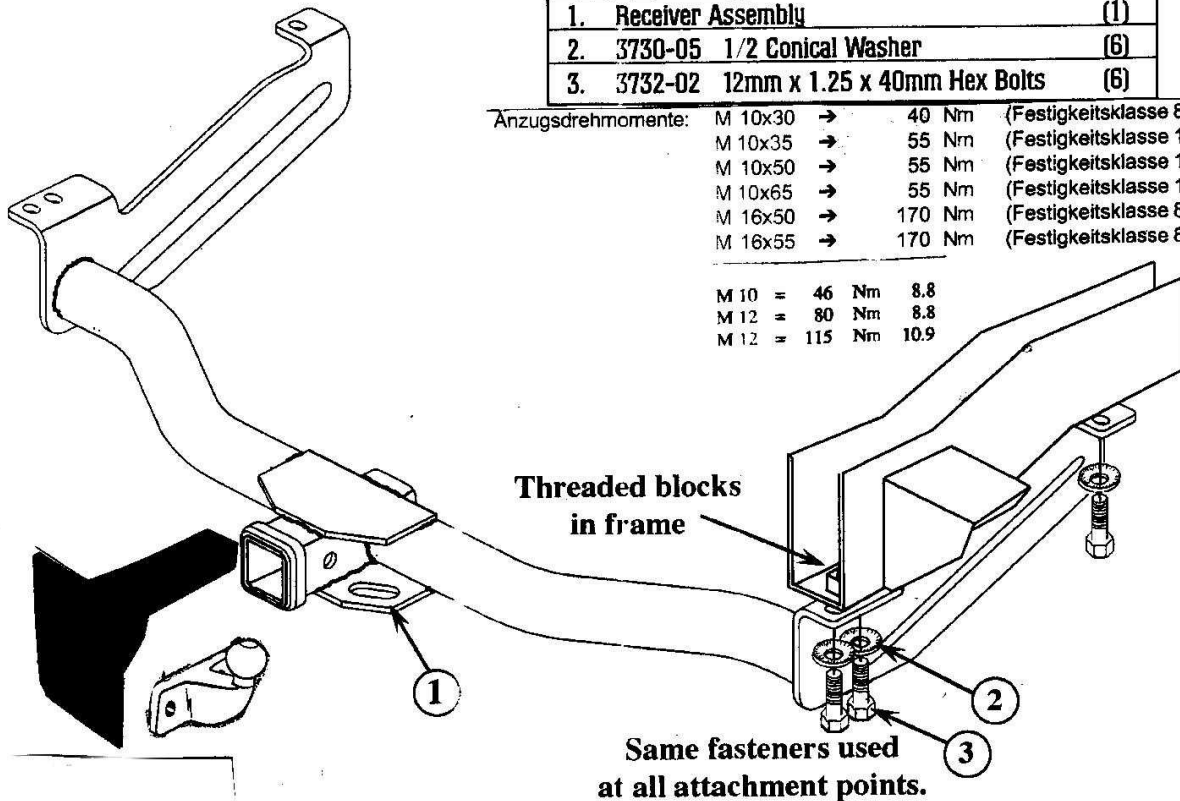

-Die Einzelprüfnummer gilt für Anhängerbock und für den Einsteckadapter.

-Kupelkopf hat ein FEE oder FEG Prüfzeichen

82720 78272